


Harald

Cardiovascular Guidewire

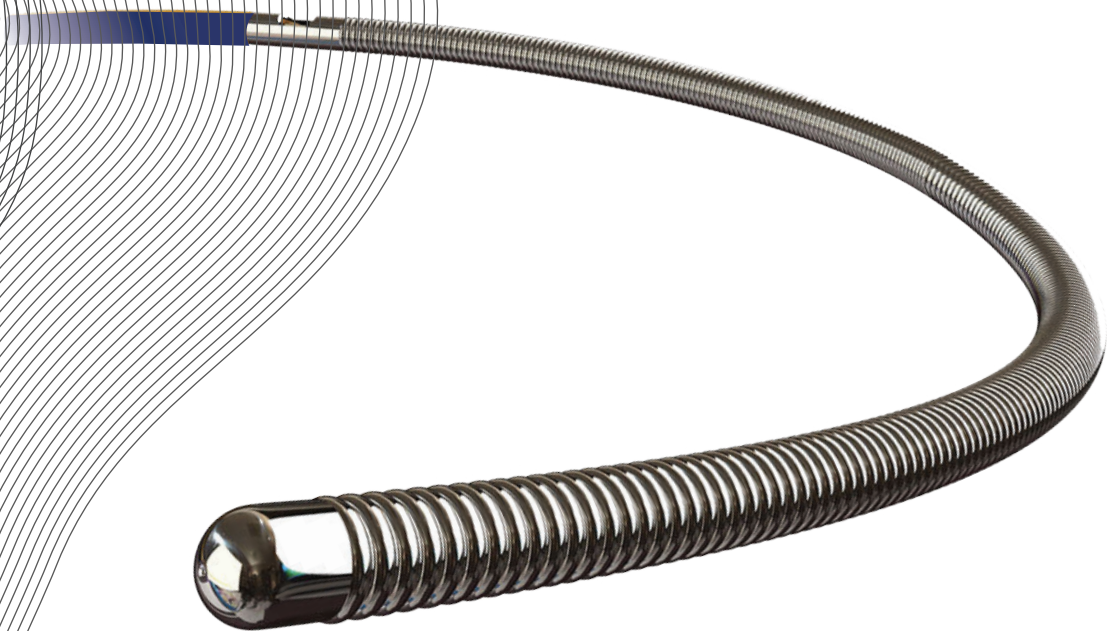

Parameters

O.D.: 0.014"/Max0.36mm
Tip radiopacity: 3.0cm
Tip Shape: Straight / J
Total length: 190cm/300cm

Features:

Dual core technology

For smooth transition between Nitinol core to SS304V

SS304V core with PTFE coating


Providing improved smooth device delivery and guide

Tungsten based polymer jacket with hydrophilic coating


Enables enhanced visualization and steering ability.

Distal Nitinol design

For excellent durability and tip shape retention.

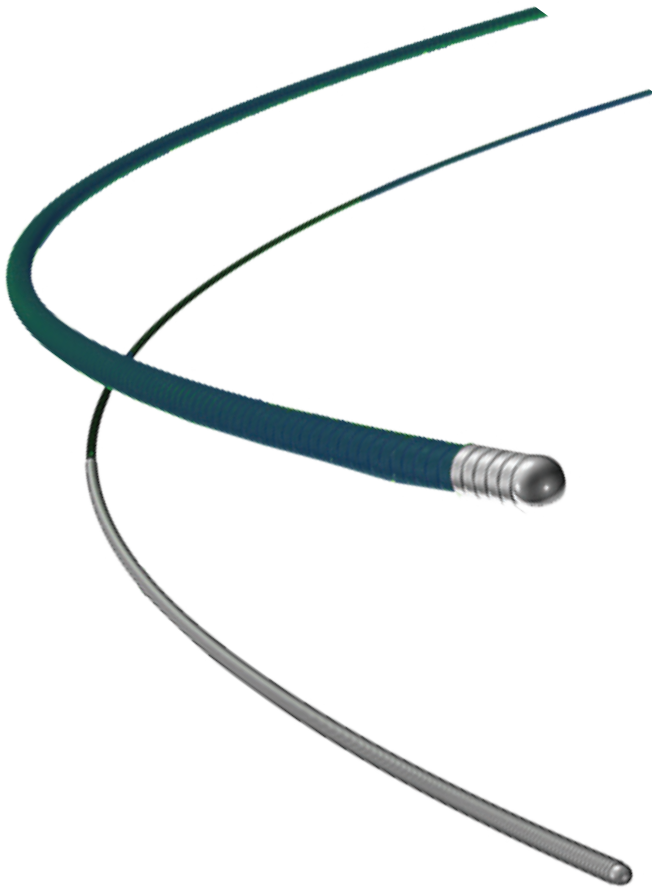

- Tip load: 0.6gf, 0.8gf, 1.0gf
- Tip radiopacity: 3cm
- Spring coil length: 1.5cm
- Polymer jacket length: 31.5cm
- Hydrophilic coating length: 36cm
- Proximal coating: PTFE



Nitinol core-to-tip design

Nitinol core to tip design provides tactile feedback and tip control, enabling exceptional 1:1 torque. Intermediate polymer sleeves maintain exposed gentle tip coils while providing a lubricious surface for device delivery.

Ordering Information:

| Diameter | Length | Tip Load | Spring coil length | Radiopaque length | Tip Shape |
|------------|--------|----------|--------------------|-------------------|-----------|
| 0.014 inch | 190cm | 0.6gf | 1.5cm | 3cm | Straight |
| 0.014 inch | 190cm | 0.6gf | 1.5cm | 3cm | J |
| 0.014 inch | 300cm | 0.6gf | 1.5cm | 3cm | Straight |
| 0.014 inch | 300cm | 0.6gf | 1.5cm | 3cm | J |
| 0.014 inch | 190cm | 0.8gf | 1.5cm | 3cm | Straight |
| 0.014 inch | 190cm | 0.8gf | 1.5cm | 3cm | J |
| 0.014 inch | 300cm | 0.8gf | 1.5cm | 3cm | Straight |
| 0.014 inch | 300cm | 0.8gf | 1.5cm | 3cm | J |
| 0.014 inch | 190cm | 1.0gf | 1.5cm | 3cm | Straight |
| 0.014 inch | 190cm | 1.0gf | 1.5cm | 3cm | J |
| 0.014 inch | 300cm | 1.0gf | 1.5cm | 3cm | Straight |
| 0.014 inch | 300cm | 1.0gf | 1.5cm | 3cm | J |



HOSMED-INC
3403 NW 82nd Avenue. Suite #102.
Doral, Florida 33122. USA
www.hosmed-inc.com
P: (954) 505-1432
E-mail: marketing@hosmed-inc.com

H O S M E D