




LOYOLA Series

3 position Manual Bed Comfort
LB3MA

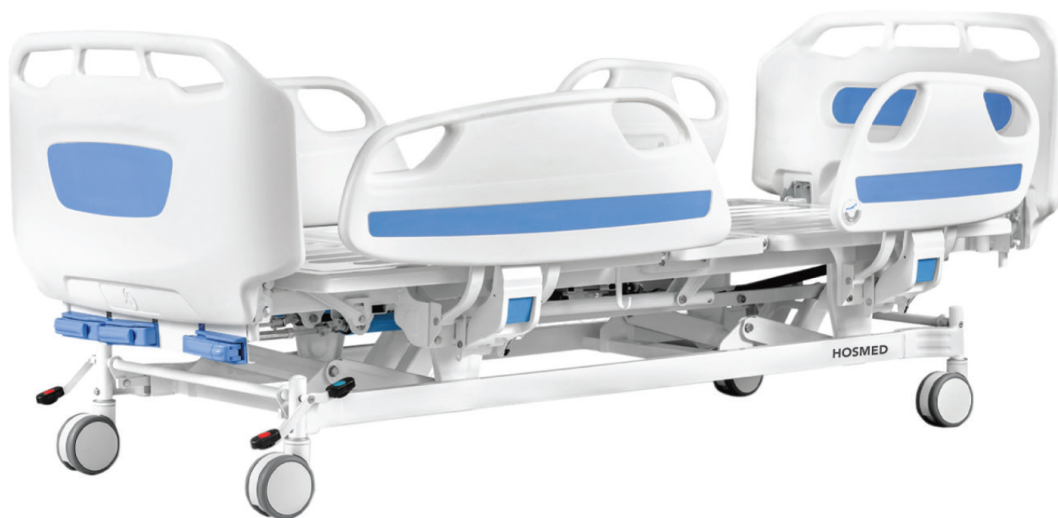

Features




Stamping forming platform, smooth surface no welding scar; bearing 250KG load. Option ABS platform and resin X-ray translucent platform



Tuck away side rail with angle indicator



Patent bumper wheel detachable, max protect the bed and patient during transportation

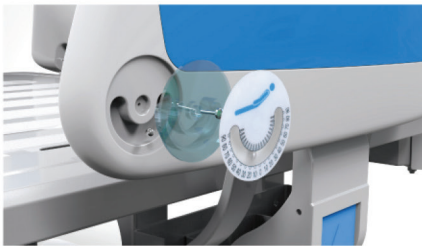

Patent angle indicator



Platic drainage hook movable



Full SS IV pole, bearing 15kg



Secure® Castors
Pass Dynamic test: Bearing 120kg run 30KM and pass obstacles 500 time



Lifting pole-Bearing 765N force



Shoes holder: 800*400mm, adjustable
Oxygen cylinder rack - adjustable for anysize tank Blocking.

Technical Chart



Design

Extra long and height head foot board, with curve surrounded design, provide comforting feeling for patients.



Brake

Break spring qualified after 10,000 times uninteruped break
Wheels TPR tire no worn out after running 30 km, save anti-winding hard shell, united forming without bolts



Steels | Painting

Baosteel from Fortune Global 500
II Process epoxy painting. ASTM testing anti-bacterial, paint thickness 0.12mm, brightness 60°, paint can resist 50kg impac.



Welding | Chassis

Panasonic robotic ensure, 360° full smooth wedding Solid bed base made of 5.0 mm stamped rotating plate. Patent angle indicator.



Hand Control

Retractable hand crank, 100,000 times remaining intact
Extreme protection device, sounds when tipped to the max position, Strong pallets to increase the bed height adjustment (500-840mm)



Plastic


Environmental plastic can be sterilized in 100°C, tensile upto 30MPa
Virgin ABS material.

Technical parameters


External size (LxW):	2280x1090 mm
Mattress platform:	1925x900 mm
Safe working load:	250 kg
Height adjustment:	435-725 mm
Back-rest adjustment:	0-75° (±10°)
Knee-rest adjustment:	0-35° (±10°)
Reverse trendelenburg:	0-12°
Trendelenburg:	0-12°
Angle indicator:	0-90°
Voltage and frequency:	100-240 V · 50/60 Hz
Plug as required (hospital grade)	

Technical configuration


Manual CPR	
One button stop	
One button trendelenburg	
Nurse lock system	
Angle indicator for back-rest and trendelenburg position	4 pcs.
linear motor	4 pcs.
5" double side castors with central locking system	4 pcs.
ABS side rail with integrated control panel	1 set
ABS bed ends with integrated LCD control panel	1 set
φ85 mm wall bumper wheel	4 pcs.
Trapeze socket	2 pcs.
IV pole	1 set
IV pole prevision	4 pcs.
Drainage hook	2 pcs.
Central locking pedal	2 pcs.




Back-rest adjustment



Height adjustment



Knee-rest adjustment



Angle indicator



3403 NW 82nd Avenue, Suite 102 E.
Doral, Florida 33122. USA
www.hosmed-inc.com